

Plus PL29E

TYPE	Glasswasher
LINE	PLUS LINE
BASKET	400x400
SIZE	470x595x710h




The **PLUS** line models are equipped with an automatic water softener that offers the possibility to break-down the formation of limestone with extreme efficiency. In fact, the water softener is completely autonomous and automatically controls its regeneration intervals according to the hardness of the inlet water; all you have to do is fill the salt tank whenever the message "lack of salt" appears on the display. The resins are regenerated during wash cycles, so no machine downtime is required.

The simple electronic board control system makes it possible to set and control the rinsing and draining times and temperatures and the relevant **Thermostops**, crucial for ensuring excellent final results. With the control panel you can choose one of its 4 washing cycles and one automatic drain cycle (with installed drain pump), easily view on the display the tank and boiler temperature, the messages of the Self-diagnosis system and the Scheduled Maintenance warning. The smart Start button changes colour to always keep you up-to-date on the dishwasher status with the greatest ease.

The **PL29E** model is suitable for washing cups, glasses, saucers and dishes (using the appropriate basket) with a useful passage up to 295 mm.

The electronic control allows you to manage various parameters to give you an absolute customisation level and the continuous self-diagnosis allows you to minimise machine downtime, suggesting some operations to be verified. The self-cleaning cycle at the end of the day cleans the wash tank and empties the boiler from the hot water, preventing limestone forming inside. The standard double peristaltic electric rinse-aid and detergent dispenser ensures the best result from each wash cycle with great savings thanks to the precise dosage managed by the electronic card; whereas, the moulded washing and rinsing arms ensure great reliability and durability. The Thermo-stop function checks that washing and rinsing begin only when the desired temperature is reached. The bodywork is made entirely of AISI 304 steel and has been designed with all components in the front to allow easy technical assistance. Sturdy and reliable dishwashers to best deal with every moment of your day.

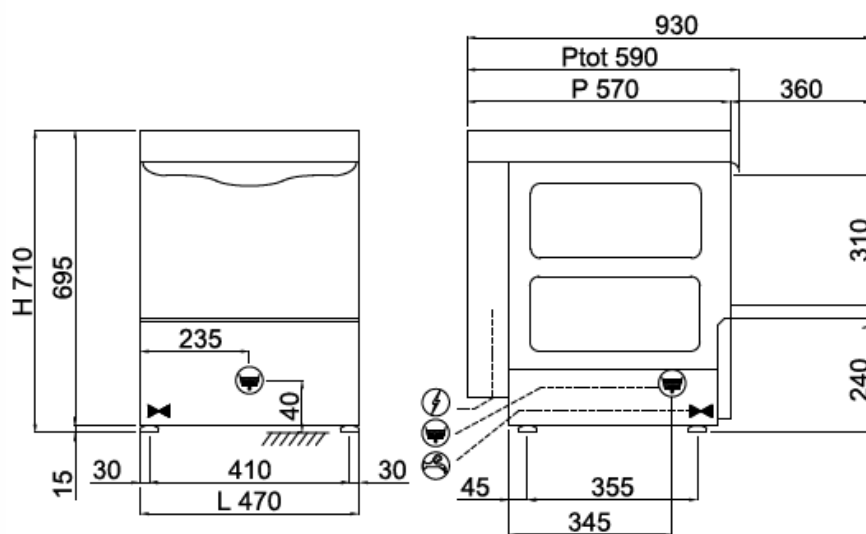

230V+T 2,86kW
L=2000 (SCHUKO)



G 3/4" M
L=1450



Ø25x30
L=1650

DISHWASHERS FEATURES PL29E

Dimensions - (mm) L - P - H	470x595x710h
n° baskets/hour - (+55°C)	Max 48
Height glass max	275mm
Ø height plate max	295mm
Tank heating element - Tank capacity	2,6kW - 17lt
Boiler heating element - Boiler capacity	2,5kW - 3,2lt
Washing pump	0,26kW / 0,35Hp
Total power input / Current	2,86kW / 16A
Standard input voltage	230V 50Hz
Recommended inlet water temperature	+55°C
Water hardness	>15 °f
Water consumption per cycle (inlet suggested pressure 2 BAR)	2,0lt
Adjustable detergent and rinse-aid dispenser	ELECTRIC
Built-in water softener	si

ACCESSORI

Saucer holder 12 pieces	1
Cutlery insert	1
Basket for glasses dim.400x400x150mm	2
Salt funnel	1

OPTIONAL

Booster pump kit 0,5Hp	-
pompa_di_scarico_installata_4_w	-
kit_doppie_pareti_isolamento_termo_acustico_e_copertura_superiore	●
Reverse osmosis system	-
Inclined basket for wine glasses dim.400x400x170mm	●
Kit 4 Stainless steel feet 50-70mm	●
2 baskets for glasses Ø400mm	●
"SOFT Door" Opening/Closing System	●
Kit with 2 Baskets and Stand	●

● = OPTIONAL INSTALLABILE, - = OPTIONAL NON INSTALLABILE