



Tunnel TM2110

| | |
|---------------|---------------------------|
| TYPE | Rack conveyor dishwashers |
| LINE | TUNNEL LINE |
| BASKET | 500x500 |
| SIZE | 1700x770x1810h |

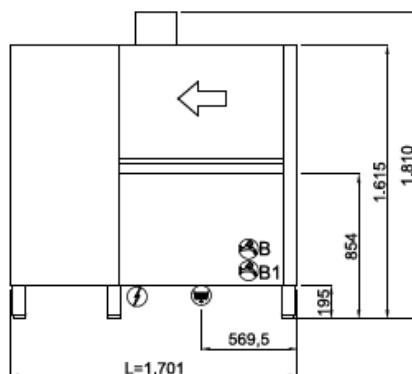

The TUNNEL Line has been designed to meet the needs of every customer, thanks to the various accessories installable, combining large workloads and optimising spaces available, simplifying operator work and reducing consumption. The models of this line are equipped with a double filtration system that retains all residues, whereas the vertical wash pumps and stainless steel wash arms ensure great performance. TUNNEL is also equipped with counterbalanced doors with double wall and anti-fall system and rounded moulded tanks.

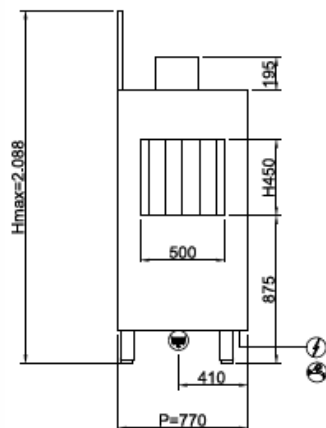

400V3N+T 24,80kW
(CABLE NOT PROVIDED)



G 3/4" M
B: 55°C
B1: 10°C
L=1500



Ø1"1/2 M
L=1500

DISHWASHERS FEATURES TM2110

| | |
|---|----------------|
| Dimensions - (mm) L - P - H | 1700x770x1810h |
| Basket dimensions | 500x500 |
| n° baskets/hour | 95/150/200 |
| Passage height max (cm) | 450 |
| Total power input | 24,8 |
| Standard input voltage | 400V3N+T 50 Hz |
| PRELAVAGGIO | |
| Tank capacity | 69 |
| FIRST WASHING | |
| Tank heating element (kW) | 10,5 |
| WASHING | |
| Tank capacity | 69 |
| FINAL RINSING | |
| Break-Tank and rinse pump | 200W |
| Boiler heating element (kW) | 12,0 |
| Water consumption | ~180 |
| Inlet water temperature (°C) | +15°C |
| Minimum water pressure (BAR) | 2 |
| Water hardness (°f) | 7÷10 °f |
| RECUPERATORE TERMICO CALORE | |
| Exhauster | 0,20 |
| Air capacity | ~70 |
| STANDARD EQUIPMENT | |
| Basket for glasses dim.500x500x100mm | 1 |
| Basket for 18 dishes dim.500x500x100mm | 2 |
| 4 division cutlery insert | 1 |
| OPTIONAL | |
| Pressure reducer with pressure gauge | ● |
| Corner dryer unit | ● |
| Internal detergent & rinse-aid dosing unit | ● |
| triplo_filtro_in_vasca_e_cassetto_in_acciaio_inox | ● |

● = OPTIONAL INSTALLABILE, ■ = OPTIONAL NON INSTALLABILE