



Tunnel TM4310


TYPE	Rack conveyor dishwashers
LINE	TUNNEL LINE
BASKET	500x500
SIZE	3119x813x1825h




The TUNNEL Line has been designed to meet the needs of every customer, thanks to the various accessories installable, combining large workloads and optimising spaces available, simplifying operator work and reducing consumption. The models of this line are equipped with a double filtration system that retains all residues, whereas the vertical wash pumps and stainless steel wash arms ensure great performance. TUNNEL is also equipped with counterbalanced doors with double wall and anti-fall system and rounded moulded tanks.

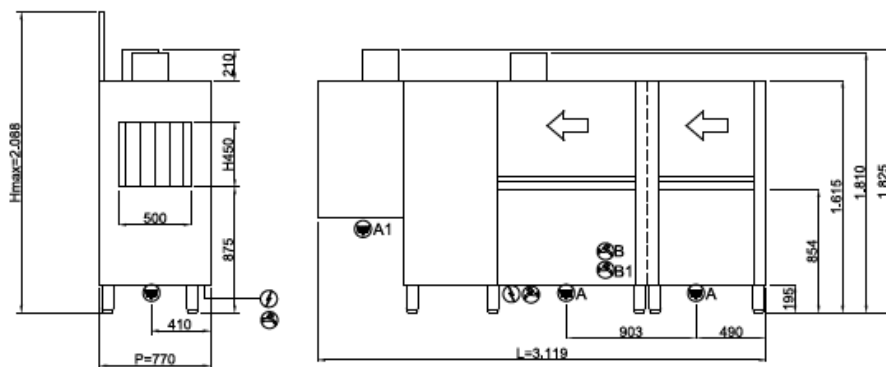

 400V3N+T 32,80kW
(CABLE NOT PROVIDED)

 G 3/4" M
B: 55°C
B1: 10°C
L=1500

 A: Ø1 1/2" M
A1: Ø31 M
L=1500

DISHWASHERS FEATURES TM4310

Dimensions - (mm) L - P - H 3119x813x1825h

Basket dimensions 500x500

n° baskets/hour 135/200/270

Passage height max (cm) 450

Total power input 32,8

Standard input voltage 400V3N+T 50 Hz

PRELAVAGGIO

Tank capacity 69

FIRST WASHING

Tank heating element (kW) 10,9

WASHING

Tank capacity 69

resistenza_vasa 10,5

FINAL RINSING

Break-Tank and rinse pump 200W

Boiler heating element (kW) 12,0

Water consumption ~230

Inlet water temperature (°C) +15°C

Minimum water pressure (BAR) 1,5

Water hardness (°f) 7÷10 °f

ASCIUGATURA

ventilatore 0,55

resistenza 6,0

RECUPERATORE_TERMICO_CALORE

Exhauster 0,20

Air capacity ~70

STANDARD EQUIPMENT

Basket for glasses dim.500x500x100mm 1

Basket for 18 dishes dim.500x500x100mm 2

4 division cutlery insert 1

OPTIONAL

Pressure reducer with pressure gauge ●

Corner pre-washing system ●

Internal detergent & rinse-aid dosing unit ●



triplo_filtro_in_vasca_e_cassetto_in_acciaio_inox



= OPTIONAL INSTALLABILE, " = OPTIONAL NON INSTALLABILE