



Smart SM29E

TYPE	Glasswasher
LINE	SMART LINE
BASKET	400x400
SIZE	470x535x710h





The dishwashers of the **SMART** line ensure maximum performance thanks to the standard **Acquatech System** which, through an atmospheric boiler and rinse pump, maintains constant temperature and pressure and optimum water consumption. SMART ensures a sanitising rinse cycle and proves to be the perfect choice for canteens, nursing homes, pastry shops, bakers and butchers where compliance with HACCP rules is essential. For those who seek glass perfection, it is possible to connect a Reverse Osmosis System which purifies water and reduces detergent and rinse-aid consumption, ensuring excellent results and perfect glasses without the need for hand drying.

The **SM29E** model is suitable for washing cups, glasses, saucers and dishes (using the appropriate basket) with a useful passage up to 315 mm. The addition of the Reverse Osmosis System, suitable detergents and tilted basket is the right answer for all premises where perfect glasses and automatic drying are indispensable elements.


The simple electronic board control system makes it possible to set and control the rinsing and draining times and temperatures and the relevant **Thermostops**, crucial for ensuring excellent final results. With the control panel you can choose one of its 4 washing cycles and one automatic drain cycle (with installed drain pump), easily view on the display the tank and boiler temperature, the messages of the Self-diagnosis system and the Scheduled Maintenance warning. The smart Start button changes colour to always keep you up-to-date on the dishwasher status with the greatest ease.

The electronic control allows you to manage various parameters to give you an absolute customisation level and the continuous self-diagnosis allows you to minimise machine downtime, suggesting some operations to be verified. The self-cleaning cycle at the end of the day cleans the wash tank and empties the boiler from the hot water, preventing limestone forming inside. The standard double peristaltic electric rinse-aid and detergent dispenser ensures the best result from each wash cycle with great savings thanks to the precise dosage managed by the electronic card; whereas, the moulded washing and rinsing arms ensure great reliability and durability. The Thermo-stop function checks that washing and rinsing begin only when the desired temperature is reached. The bodywork is made entirely of AISI 304 steel and has been designed with all components in the front to allow easy technical assistance.

EN IEC 63136 COMPLIANT MODEL

View the [performance table](#)



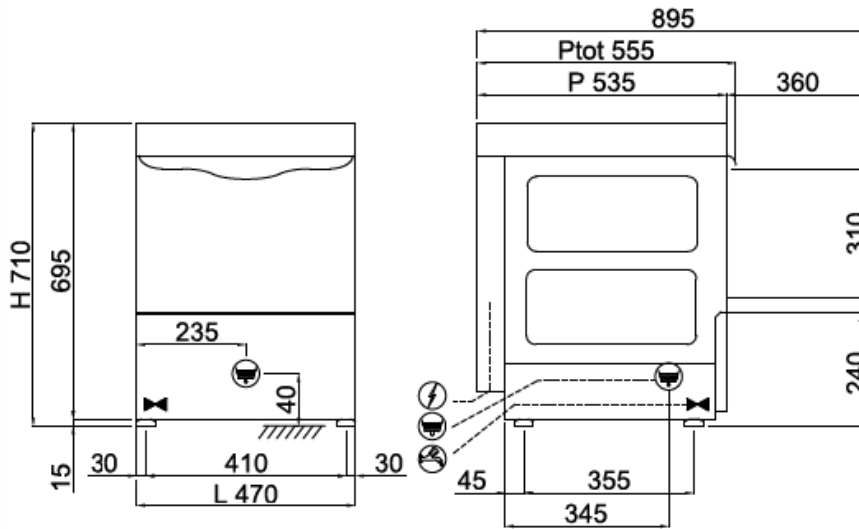

230V+T 2,86kW
L=2000 (SCHUKO)

G 3/4" M
L=1450

Ø25x30
L=1650

DISHWASHERS FEATURES SMART LINE SM29E

Dimensions - (mm) L - P - H	470x535x710h
n° baskets/hour - (+55°C)	Max 48
Height glass max	285mm
Ø height plate max	305mm
Tank heating element - Tank capacity	2,6kW - 17l
Boiler heating element - Boiler capacity	2,6kW - 3,2l
Washing pump	0,26kW / 0,35Hp
Total power input / Current	2,86kW / 16A
Standard input voltage	230V1N - 50Hz
Recommended inlet water temperature	+55°C
Water hardness	7°f - 10°f
Water consumption per cycle (inlet suggested pressure 2 BAR)	2l
Adjustable detergent and rinse-aid dispenser	STANDARD
Acquatech system rinse	STANDARD
STANDARD EQUIPMENT	
Saucer holder 12 pieces	1
Cutlery insert	1
Basket for glasses dim.400x400x150mm	2
OPTIONAL	
Drain pump kit 32W with Ecoclean	●
Reverse osmosis system	●
Inclined basket for wine glasses dim.400x400x170mm	●
Kit 4 Stainless steel feet 50-70mm	●
2 baskets for glasses Ø400mm	●
"SOFT Door" Opening/Closing System	●
Kit with 2 Baskets and Stand	●

● = OPTIONAL INSTALLABILE, ◻ = OPTIONAL NON INSTALLABILE