

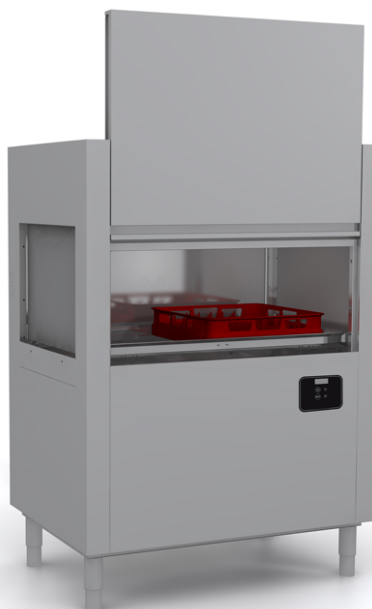


Tunnel TM1110

TYPE	Rack conveyor dishwashers
LINE	TUNNEL LINE
BASKET	500x500
SIZE	1150x770x1810h mm

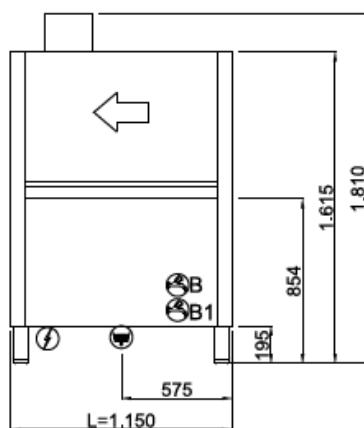

The TUNNEL Line has been designed to meet the needs of every customer, thanks to the various accessories installable, combining large workloads and optimising spaces available, simplifying operator work and reducing consumption. The models of this line are equipped with a double filtration system that retains all residues, whereas the vertical wash pumps and stainless steel wash arms ensure great performance. TUNNEL is also equipped with counterbalanced doors with double wall and anti-fall system and rounded moulded tanks.

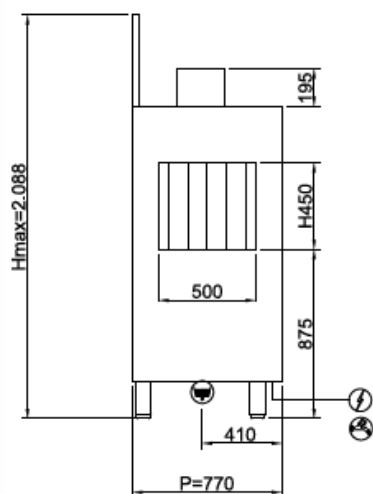

400V3N+T 24,40kW
(CABLE NOT PROVIDED)



G 3/4" M
B: 55°C
B1: 10°C
L=1500"



Ø1"1/2 M
L=1500

STANDARD EQUIPMENT

Basket for glasses dim.500x500x100mm	1
Basket for 18 dishes dim.500x500x100mm	2

DISHWASHERS FEATURES TUNNEL LINE TM1110

Dimensions - (mm) L - P - H	1150x770x1810h mm
Basket dimensions	500x500 mm
n° baskets/hour	120/60
Passage height max (cm)	450 mm
Total power input	24,7 kW (15°C)
Standard input voltage	400V3N - 50 Hz

WASHING

Tank capacity (lt)	70 lt
Washing pump	1,5 kW - 2 hp
Tank heating element (kW)	10,5 kW

FINAL RINSING

Boiler heating element (kW)	12 kW
Water consumption	150 lt/h
Inlet water temperature (°C)	+15°C
Minimum water pressure (BAR)	2 bar
Water hardness (°f)	7°f - 10°f

RECUPERATORE TERMICO CALORE

Exhauster	0,2 kW
Air capacity	70 m3/h

STANDARD EQUIPMENT

Basket for glasses dim.500x500x100mm	1
Basket for 18 dishes dim.500x500x100mm	2
4 division cutlery insert	1
Basket for glasses dim.500x500x100mm	1
Basket for 18 dishes dim.500x500x100mm	2

OPTIONAL

Pressure reducer with pressure gauge	●
Break-Tank and 200W rinse pump	●
Corner dryer unit	●
Option extra power 9,5 Kw	●
Internal detergent & rinse-aid dosing unit	●

Triple tank filter and stainless steel drawer

● = OPTIONAL INSTALLABILE, ■ = OPTIONAL NON INSTALLABILE