



Tunnel TM2210

TYPE	Rack conveyor dishwashers
LINE	TUNNEL LINE
BASKET	500x500
SIZE	2300x770x1825h mm

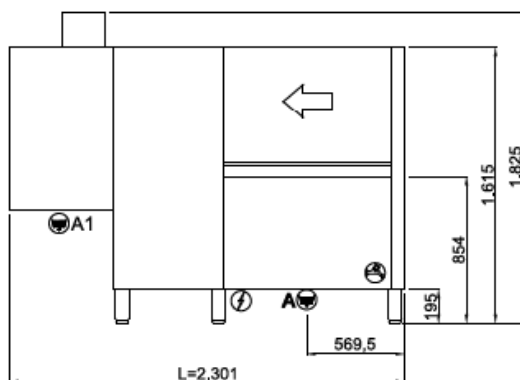

The TUNNEL Line has been designed to meet the needs of every customer, thanks to the various accessories installable, combining large workloads and optimising spaces available, simplifying operator work and reducing consumption. The models of this line are equipped with a double filtration system that retains all residues, whereas the vertical wash pumps and stainless steel wash arms ensure great performance. TUNNEL is also equipped with counterbalanced doors with double wall and anti-fall system and rounded moulded tanks.

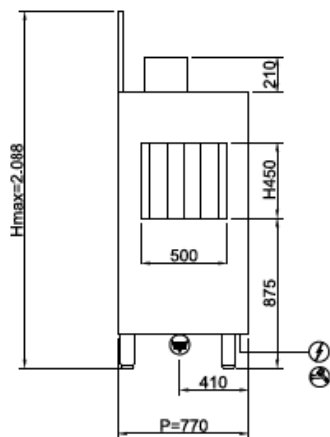

400V3N+T 28,60kW
(CABLE NOT PROVIDED)



G 3/4" M
55°C
L=1500



A: Ø1"1/2 M
A1: Ø31 M
L=1500

STANDARD EQUIPMENT

Basket for glasses dim.500x500x100mm

1

Basket for 18 dishes dim.500x500x100mm

2

DISHWASHERS FEATURES TUNNEL LINE TM2210

Dimensions - (mm) L - P - H

2300x770x1825h mm

Basket dimensions

500x500 mm

n° baskets/hour

200/150/95

Passage height max (cm)

450 mm

Total power input

27,5 kW (50°C) - 35,5 kW (15°C)

Standard input voltage

400V3N - 50 Hz

WASHING

Tank capacity (lt)

70 lt

Washing pump

1,5 kW - 2 hp

Tank heating element (kW)

10,5 kW

FINAL RINSING

Break-Tank and rinse pump

0,2 kW

Boiler heating element (kW)

9,5 kW

Water consumption

160 lt/h

Inlet water temperature (°C)

+50°C

Minimum water pressure (BAR)

2 bar

Water hardness (°f)

7°f - 10°f

DRYING

Fan

0,55 kW

portata_d_aria_asciugatura

1400 m3/h

Heating element

6 kW

STANDARD EQUIPMENT

Basket for glasses dim.500x500x100mm

1

Basket for 18 dishes dim.500x500x100mm

2

4 division cutlery insert

1

Basket for glasses dim.500x500x100mm

1

Basket for 18 dishes dim.500x500x100mm

2

OPTIONAL

Corner dryer unit

•

Option extra power 9,5 Kw

•

Steam outlet chimney

•

Internal detergent & rinse-aid dosing unit

•

Triple tank filter and stainless steel drawer

•

•

= OPTIONAL INSTALLABILE, ▬ = OPTIONAL NON INSTALLABILE