



# Tunnel TM3110



---

|               |                           |
|---------------|---------------------------|
| <b>TYPE</b>   | Rack conveyor dishwashers |
| <b>LINE</b>   | TUNNEL LINE               |
| <b>BASKET</b> | 500x500                   |
| <b>SIZE</b>   | 1968x770x1810h mm         |

---



The TUNNEL Line has been designed to meet the needs of every customer, thanks to the various accessories installable, combining large workloads and optimising spaces available, simplifying operator work and reducing consumption. The models of this line are equipped with a double filtration system that retains all residues, whereas the vertical wash pumps and stainless steel wash arms ensure great performance. TUNNEL is also equipped with counterbalanced doors with double wall and anti-fall system and rounded moulded tanks.

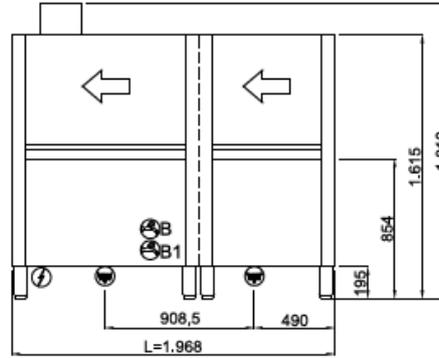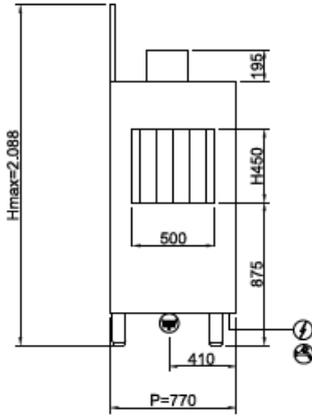

 400V3N+T 25,90kW  
(CABLE NOT PROVIDED)

 G 3/4" M  
B: 55°C  
B1: 10°C  
L=1500

 Ø1"1/2 M  
L=1500

**STANDARD EQUIPMENT**

|  |   |
|--|---|
| Basket for glasses dim.500x500x100mm   | 1 |
| Basket for 18 dishes dim.500x500x100mm | 2 |

**DISHWASHERS FEATURES TUNNEL LINE TM3110**

|                             |                   |
|-----------------------------|-------------------|
| Dimensions - (mm) L - P - H | 1968x770x1810h mm |
| n° baskets/hour             | 210/110           |
| Passage height max (cm)     | 450 mm            |
| Total power input           | 37,7 kW (15°C)    |
| Standard input voltage      | 400V3N - 50 Hz    |

**PRE-WASHING**

|                    |               |
|--------------------|---------------|
| Tank capacity (lt) | 70 l          |
| Washing pump       | 1,5 kW - 2 Hp |

**WASHING**

|                           |               |
|---------------------------|---------------|
| Tank capacity (lt)        | 70 l          |
| Washing pump              | 1,5 kW - 2 Hp |
| Tank heating element (kW) | 10,5 kW       |

**FINAL RINSING**

|                              |            |
|------------------------------|------------|
| Boiler heating element (kW)  | 20 kW      |
| Water consumption            | ~ 300 l/h  |
| Inlet water temperature (°C) | +15°C      |
| Minimum water pressure (BAR) | 2 bar      |
| Water hardness (°f)          | 7°f - 10°f |

**RECUPERATORE TERMICO CALORE**

|              |           |
|--------------|-----------|
| Exhauster    | 0,20 kW   |
| Air capacity | ~ 70 m3/h |

**STANDARD EQUIPMENT**

|  |   |
|--|---|
| Basket for glasses dim.500x500x100mm   | 1 |
| Basket for 18 dishes dim.500x500x100mm | 2 |
| 4 division cutlery insert              | 1 |
| Basket for glasses dim.500x500x100mm   | 1 |
| Basket for 18 dishes dim.500x500x100mm | 2 |

**OPTIONAL**

|                                      |   |
|--------------------------------------|---|
| Pressure reducer with pressure gauge | ● |
| Break-Tank and 200W rinse pump       | ● |
| Corner pre-washing system            | ● |



|   |   |
|---|---|
| Corner dryer unit                             | ● |
| Option extra power 9,5 Kw                     | ● |
| Internal detergent & rinse-aid dosing unit    | ● |
| Triple tank filter and stainless steel drawer | ● |

● = OPTIONAL INSTALLABILE, ■ = OPTIONAL NON INSTALLABILE

