

## Tunnel TM3310


---


<b>TYPE</b>	Rack conveyor dishwashers
<b>LINE</b>	TUNNEL LINE
<b>BASKET</b>	500x500
<b>SIZE</b>	2568x770x1825h mm


---




The TUNNEL Line has been designed to meet the needs of every customer, thanks to the various accessories installable, combining large workloads and optimising spaces available, simplifying operator work and reducing consumption. The models of this line are equipped with a double filtration system that retains all residues, whereas the vertical wash pumps and stainless steel wash arms ensure great performance. TUNNEL is also equipped with counterbalanced doors with double wall and anti-fall system and rounded moulded tanks.

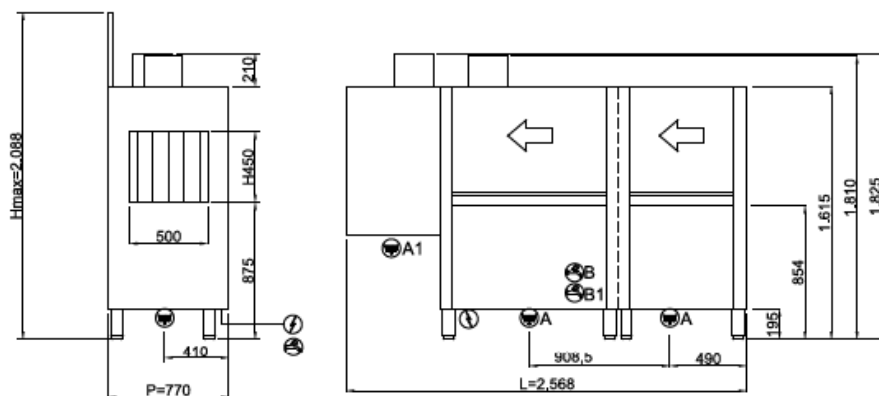

 400V3N+T 32,40kW  
(CABLE NOT PROVIDED)

 G 3/4" M  
B: 55°C  
B1: 10°C  
L=1500

 A: Ø1"1/2 M  
A1: Ø31 M  
L=1500

#### STANDARD EQUIPMENT

Basket for glasses dim.500x500x100mm	1
Basket for 18 dishes dim.500x500x100mm	2

#### DISHWASHERS FEATURES TUNNEL LINE TM3310

Dimensions - (mm) L - P - H	2568x770x1825h mm
Basket dimensions	500x500 mm
n° baskets/hour	210/110
Passage height max (cm)	450 mm
Total power input	44,2 kW (15°C)
Standard input voltage	400V3N - 50 Hz

#### PRE-WASHING

Tank capacity (lt)	70 l
Washing pump	1,5 kW - 2 Hp

#### WASHING

Tank capacity (lt)	70 l
Washing pump	1,5 kW - 2 Hp
Tank heating element (kW)	10,5 kW

#### FINAL RINSING

Boiler heating element (kW)	20 kW
Water consumption	~ 300 l/h
Inlet water temperature (°C)	+15°C
Minimum water pressure (BAR)	2 bar
Water hardness (°f)	7°f - 10°f

#### DRYING

Fan	0,55 kW
portata_d_aria_asciugatura	~ 1400 m3/h
Heating element	6 kW

#### RECUPERATORE TERMICO CALORE

Exhauster	0,20 kW
Air capacity	~ 70 m3/h

#### STANDARD EQUIPMENT

Basket for glasses dim.500x500x100mm	1
Basket for 18 dishes dim.500x500x100mm	2
4 division cutlery insert	1
Basket for glasses dim.500x500x100mm	1
Basket for 18 dishes dim.500x500x100mm	2



OPTIONAL	
Pressure reducer with pressure gauge	●
Break-Tank and 200W rinse pump	●
Corner pre-washing system	●
Option extra power 9,5 Kw	●
Internal detergent & rinse-aid dosing unit	●
Triple tank filter and stainless steel drawer	●
● = OPTIONAL INSTALLABILE, ■ = OPTIONAL NON INSTALLABILE	