



Exus X28E

TYPE	Glasswasher
LINE	EXUS LINE
BASKET	400x400
SIZE	470x535x660h





The **EXUS** line is characterised by its wide range of models suitable for every situation. The control system via the simple electronic board allows you to set and control the rinse and drain times and temperatures and the relevant **Thermostop**, which are essential to guarantee an excellent end result. Through the control panel you can choose one of its 4 washing cycles and an automatic drain cycle (with drain pump installed), easily view on the display the tank and boiler temperature, messages from the self-diagnosis system and the Scheduled Maintenance warning.

The colour-changing **Intelligent Start button** keeps you updated on the status of the dishwasher with great ease.

The **X28E** model is suitable for washing cups, saucers and glasses with a passage width of up to 270 mm


The **electronic control** allows you to manage various parameters to give you a high level of customisation according to your needs while the self-diagnosis allows you to minimise machine downtime by already suggesting a few simple operations to be carried out to resolve the situation.

The self-cleaning cycle at the end of the day allows you to clean the washing tank and empty the boiler of hot water, thus preventing limescale build-up inside. Thanks to the **Thermostop** function, washing and rinsing only start once the desired temperature has been reached.

The **double electric detergent and rinse aid dispenser installed as standard** guarantees maximum results from each washing cycle with great savings due to the precise dosage managed by the electronic card; the moulded washing and rinsing impellers on the other hand ensure great reliability and durability. The body is entirely in **AISI 304** steel and has been designed with all components at the front for easy servicing by the technician.

EN IEC 63136 COMPLIANT MODEL

View the [performance table](#)

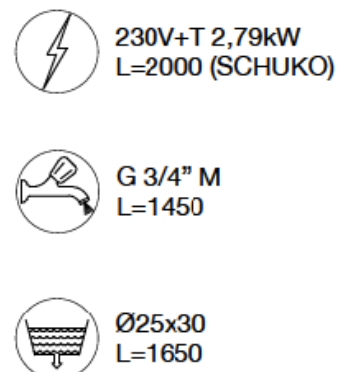

Dimensions - (mm) L - P - H	470x535x660h
n° baskets/hour - (+55°C)	40
Height glass max	250mm
Ø height plate max	275mm
Tank heating element - Tank capacity	2,6kW - 17lt
Boiler heating element - Boiler capacity	2,5kW - 3,2lt
Washing pump	0,19kW / 0,25Hp
Total power input / Current	2,79kW / 16A
Standard input voltage	230V 50Hz
Recommended inlet water temperature	+55°C
Water hardness	7÷10 °f
Water consumption per cycle (inlet suggested pressure 2 BAR)	2,0lt
Adjustable detergent and rinse-aid dispenser	ELECTRIC

Saucer holder 12 pieces	1
Cutlery insert	1
Basket for glasses dim.400x400x150mm	2

Booster pump kit 0,5Hp	●
Drain pump kit 32W with Ecoclean	●
Reverse osmosis system	-
Inclined basket for wine glasses dim.400x400x170mm	●
Kit 4 Stainless steel feet 50-70mm	●